




T2-Series Metric Corebarrels

The double tube T2 series metric core barrels are widely used and valued for their simplicity, ease of use and thin Kerf.

Below are basic specifications and part numbering for the T2 compatible systems offered by Northeast Geotechnical Supply. Refer to the next page for a detailed parts breakdown

| Metric T2-Compatible Core Barrels | | | | | | | | | |
|-----------------------------------|----------|---------------|--------------|----------------------|---------|------------|-----------|------------|-----------|
| Type | OD mm | Core OD mm | Rod Conn. | Complete Core Barrel | | Inner Tube | | Outer Tube | |
| | | | | 1.5 M | 3.0 M | 1.5 M | 3.0 M | 1.5m | 3.0 M |
| T2-46 | 46 | 32 | 42 mm | 10051-2 | 10051-3 | 192037-3 | 192037-4 | 192036-3 | 192036-4 |
| T2-56 | 56 | 42 | 50 mm | 10052-2 | 10052-3 | 192037-5 | 192037-6 | 192036-5 | 192036-6 |
| T2-66 | 66 | 52 | 50 mm | 10053-2 | 10053-3 | 192037-7 | 192037-8 | 192036-7 | 192036-8 |
| T2-76 | 76 | 62 | 50 mm | 10054-2 | 10054-3 | 192037-9 | 192037-10 | 192036-9 | 192036-10 |
| T2-86 | 86 | 72 | 50 mm | 10055-2 | 10055-3 | 192037-11 | 192037-12 | 192036-11 | 192036-12 |
| T2-101 | 101 | 84 | ---- | 10056-2 | 10056-3 | 192037-13 | 192037-14 | 192036-13 | 192036-14 |

Replacement parts for T2 Series Core Barrels

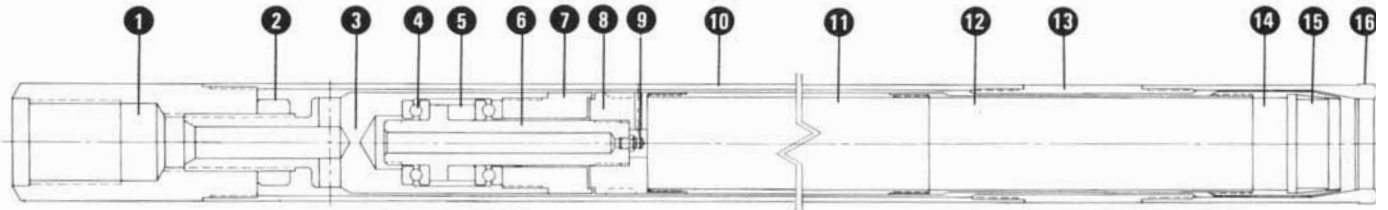

SPARES OR REPLACEMENT PARTS

| Item | Description | T2-46 | | T2-56 | | T2-66 | | T2-76 | | T2-86 | | T2-101 | |
|------|--------------------|----------|-----------|----------|-----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| | | Part No. | Wgt. Kgs. | Part No. | Wgt. Kgs. | Part No. | Wgt. Kgs. | Part No. | Wgt. Kgs. | Part No. | Wgt. Kgs. | Part No. | Wgt. Kgs. |
| 1. | Outer Head | 192027-2 | 1.1 | 192027-3 | 1.7 | 192027-4 | 2.1 | 192027-5 | 2.9 | 192027-6 | 4.6 | 192027-7 | 6.2 |
| 2. | Lock Nut | 192028-2 | * | 192028-3 | * | 192028-4 | * | 192028-5 | * | 192028-6 | * | 192028-7 | * |
| 3. | Brg. Housing | 192029-2 | 0.5 | 192029-3 | 0.9 | 192029-4 | 1.1 | 192029-5 | 1.6 | 192029-6 | 2.4 | 192029-7 | 3.4 |
| 4. | Thrust Ball Brg. | 192030-2 | * | 192030-3 | * | 192030-4 | * | 192030-5 | * | 192030-6 | * | 192030-7 | * |
| 5. | Cushion Ring | 192031-2 | * | 192031-3 | * | 192031-4 | * | 192031-5 | * | 192031-6 | * | 192031-7 | * |
| 6. | Spindle | 192032-2 | * | 192032-3 | * | 192032-4 | 0.45 | 192032-5 | 0.45 | 192032-6 | 0.45 | 192032-7 | 0.7 |
| 7. | Brg. Housing Cap | 192033-2 | * | 192033-3 | 0.5 | 192033-4 | 0.6 | 192033-5 | 0.9 | 192033-6 | 1.3 | 192033-7 | 1.5 |
| 8. | Inner Head | 192034-2 | * | 192034-3 | 0.46 | 192034-4 | 0.55 | 192034-5 | 0.8 | 192034-6 | 1.2 | 192034-7 | 1.7 |
| 9. | Grease Nipple | 192035-2 | * | 192035-3 | * | 192035-4 | * | 192035-5 | * | 192035-6 | * | 192035-7 | * |
| 10. | Outer Tube 1.5 M | 192036-3 | 4.2 | 192036-5 | 6.1 | 192036-7 | 7.0 | 192036-9 | 9.1 | 192036-11 | 10.1 | 192036-13 | 14.0 |
| 10. | Outer Tube 3.0 M | 192036-4 | 8.0 | 192036-6 | 11.7 | 192036-8 | 13.3 | 192036-10 | 17.3 | 192036-12 | 19.2 | 192036-14 | 26.7 |
| 11. | Inner Tube 1.5 M | 192037-3 | 2.4 | 192037-5 | 3.5 | 192037-7 | 4.0 | 192037-9 | 5.2 | 192037-11 | 5.8 | 192037-13 | 8.0 |
| 11. | Inner Tube 3.0 M | 192037-4 | 5.1 | 192037-6 | 7.4 | 192037-8 | 8.4 | 192037-10 | 10.9 | 192037-12 | 12.1 | 192037-14 | 16.8 |
| 12. | Extension Tube | 192038-2 | * | 192038-3 | * | 192038-4 | * | 192038-5 | * | 192038-6 | * | 192038-7 | 0.5 |
| 13. | Reaming Shell Blk. | 192039-2 | * | 192039-3 | 0.54 | 192039-4 | 0.6 | 192039-5 | 0.8 | 192039-6 | 0.9 | 192039-7 | 1.2 |
| 14. | Core Lifter Case | 192040-2 | * | 192040-3 | * | 192040-4 | * | 192040-5 | * | 192040-6 | * | 192040-7 | 4.5 |
| 15. | Core Lifter | 192041-2 | * | 192041-3 | * | 192041-4 | * | 192041-5 | * | 192041-6 | * | 192041-7 | * |
| 16. | Protector | 192042-2 | * | 192042-3 | 0.48 | 192042-4 | 0.55 | 192042-5 | 0.7 | 192042-6 | 0.8 | 192042-7 | 1.1 |

*Less Than 0.45 Kilogram

(Multiply kg x 2.2 for lbs.)